


WSK026

数控金刚线蓝宝石开方机

WSK026 CNC cylindrical plain grinding machine for sapphire

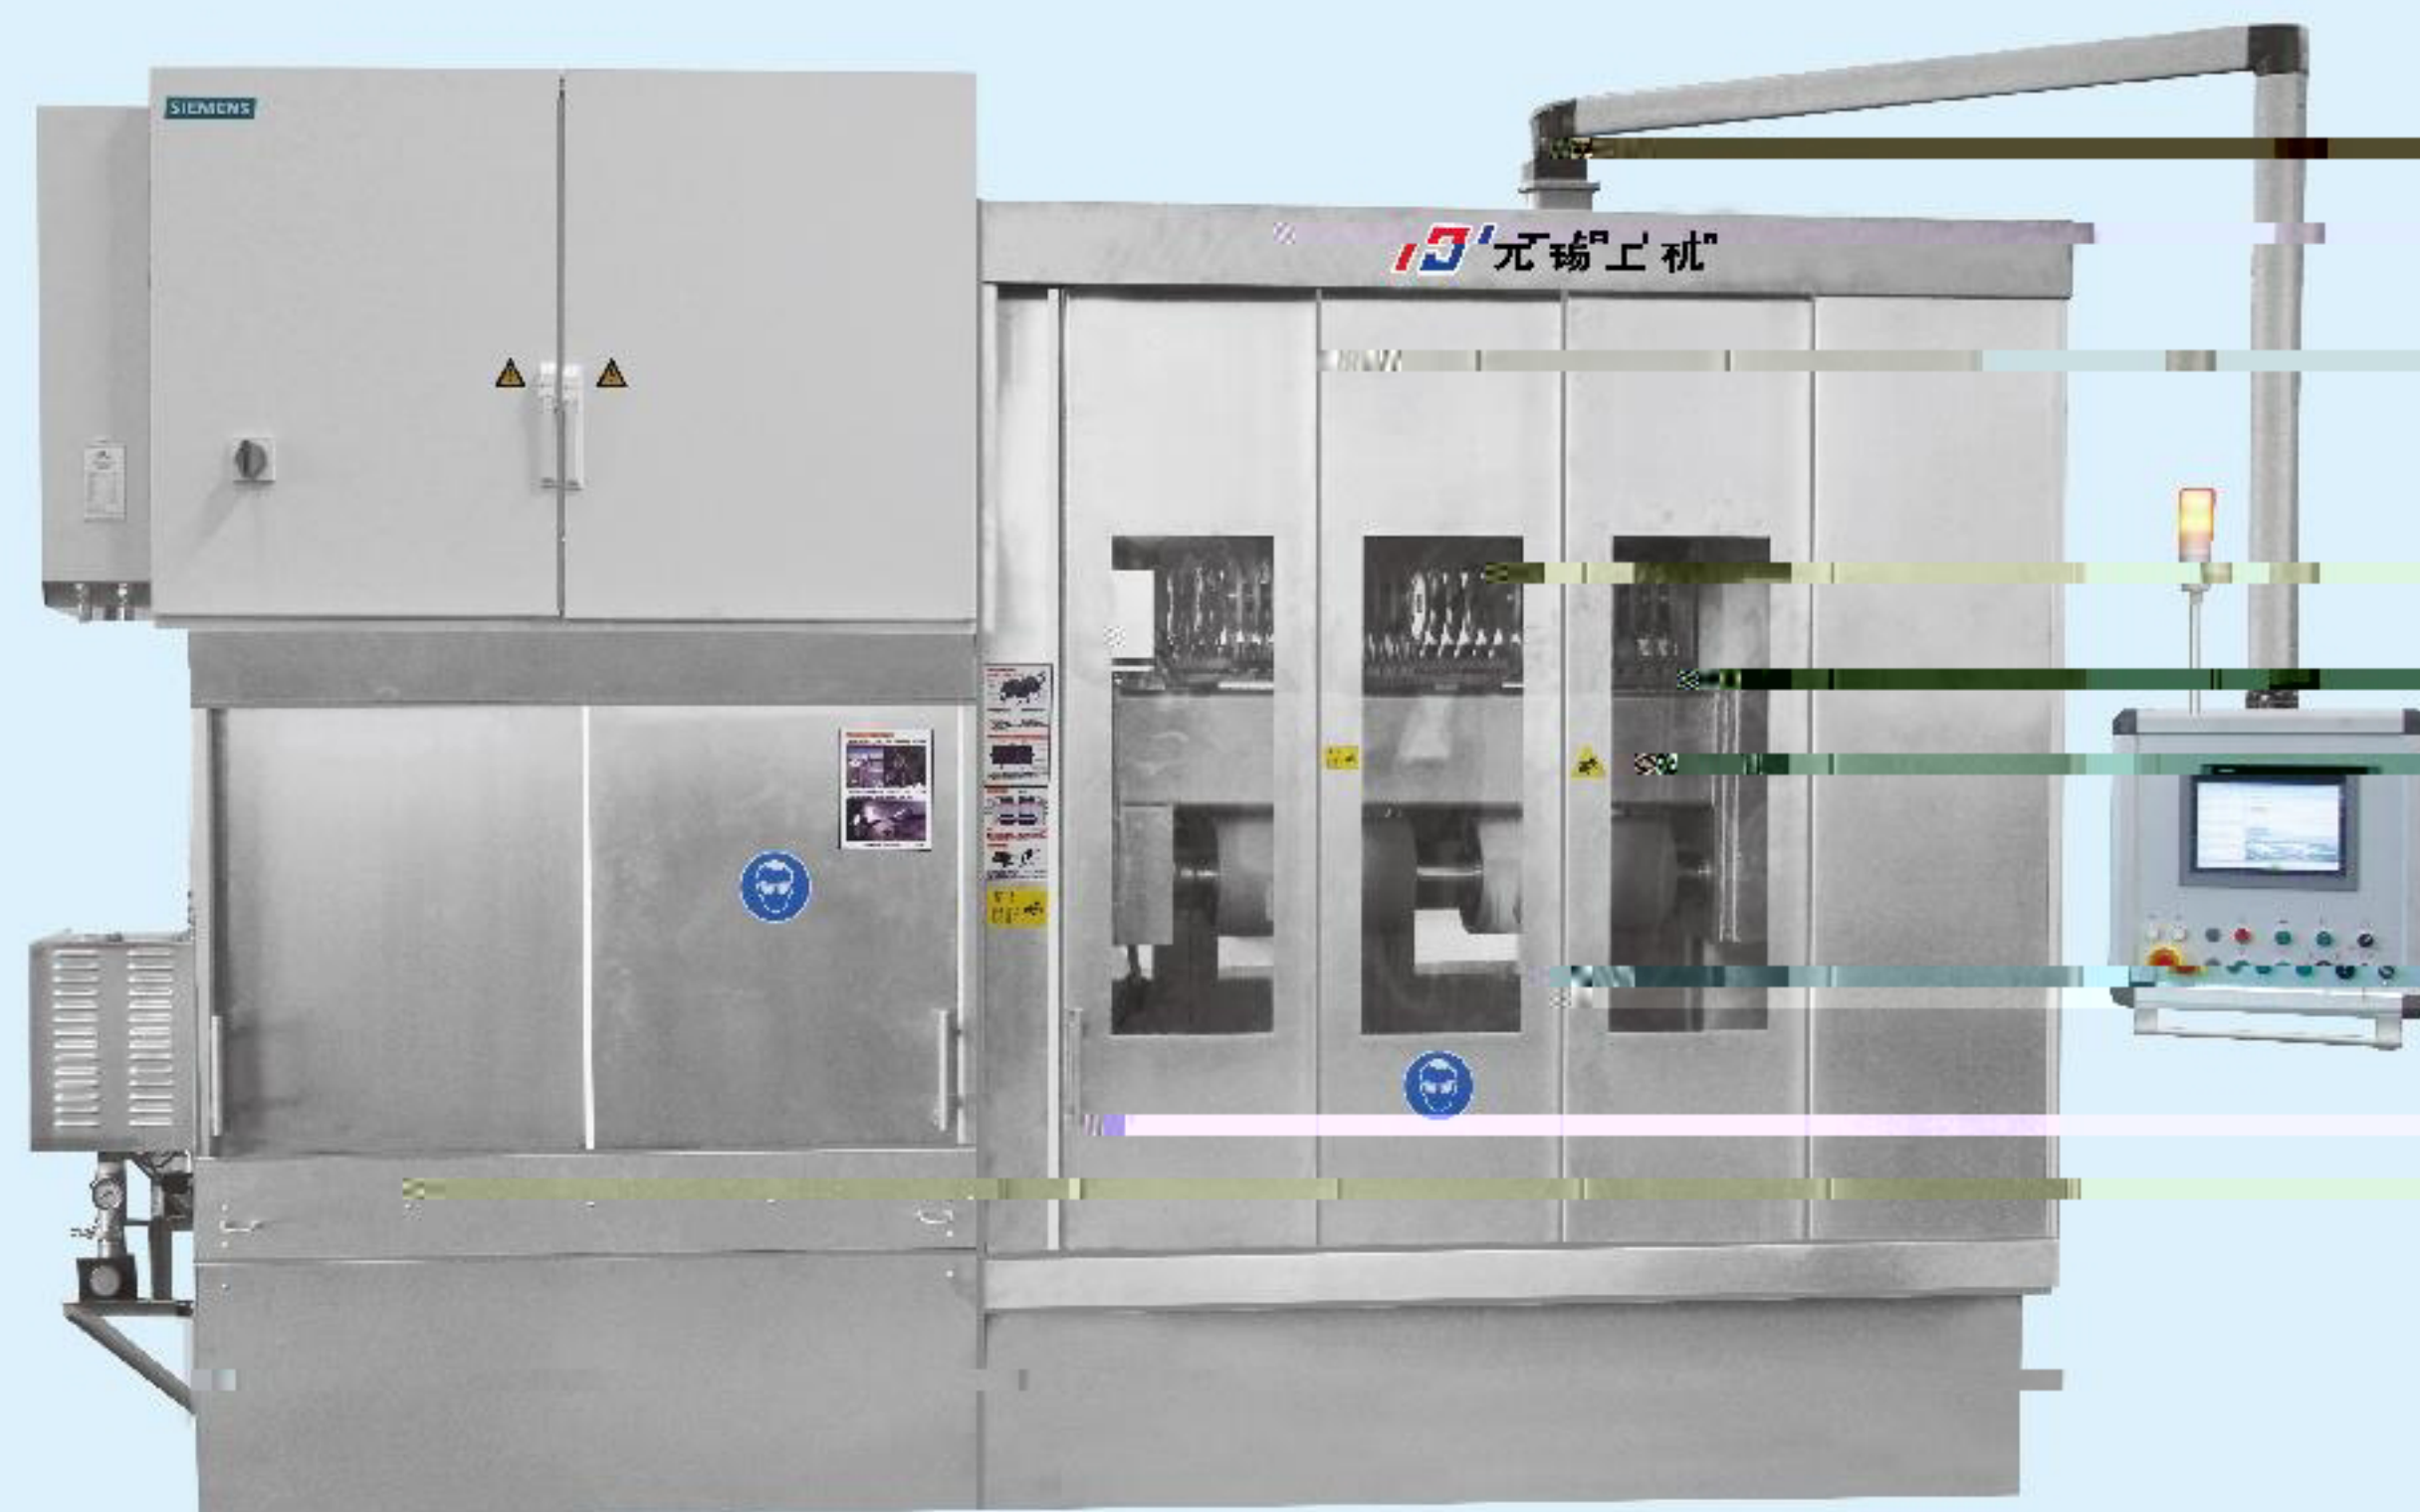


技术规格参数 Specifications and Technical Parameters

加工工件参数 Work piece parameters	
工件规格 Specifications	Φ500x500mmx2件
工件重量 Weight	< 250Kg x 2件
主要参数 Main parameters	
金刚线直径 Diameter of diamond wire	10.00 ± 0.5mm
平行线网数量 Quantity of parallel wire	根据导轮间距而定 according to slot pitch or guide wheel
线网间距 Spacing between lines	11.1mm 或 12.5mm 或 15mm 或 17.5mm 或 20mm
工件台速 Speed of worktable	开方速度 0.0-50mm/min 切方速度 0.0-50mm/min
加速度 Acceleration	5-10m/s ² (max)
线速度 Line speed	35m/s (max)
摇摆角度 Swing angle	+8°
摇摆速度 Swing speed	20°/s (max)
工件晶向 Work piece crystal orientation	360° + 90°
切割方向 Slicing orientation	前进或后退切割或双向切割 forward/backward/slow way exchange direction of cutting
电源供给及配套设施 Power supply and matched facility	
电源要求 Requirement of power	电压 voltage: 380V 频率 frequency: 50Hz
冷却水流入温度 Cooling water	10°C-20°C
周围环境温度 Environmental temperature	15°C-25°C

设备切割示意图 Cutting sketch map

- 本设备为金刚线多线开方机，主要用于新能源行业，LED 蓝宝石锭的开方、切视窗片以及半导体行业、光伏行业、棒、多晶硅锭的开方，是新能源的主要配套设备。
- 采用西门子控制技术的一体化PC机，15" 触控屏；
- 设备布局合理，机械强度高且稳定性好，整体外观采用全封闭不锈钢设计；
- 摇摆单元优化了金刚线切割蓝宝石的性能，缩短了切割时间，并提高了晶锭的端面质量；减少滑轮数量的设计，更有效地降低线耗、滑轮等耗材；
- 模块化组合，上下工作台都可进行360°+90°的旋转调整晶向，方便切出任意尺寸；
- 通过调整切割轮上的线宽，方便切割各种尺寸的晶片；
- 优化张力控制系统，利用高张力切割，保证了开方的质量和效率；
- 利用操作手柄，可以快速布置线网，缩短了设备待机时间，减少人员管理成本；
- 采用双工位，多方位调节晶向，以及灵活的布线配置，可应用于蓝宝石的开方以及切片和截断，切割视窗玻璃等功能。

- This equipment is diamond wire saw squarer, applied in New Energy industry processing LED sapphire ingots, cutting windows film and used in semi-conductor industry, squaring monocrystalline silicon, round bar and polycrystalline ingots, which is the main equipment for new energy industry.
- Apply integrated PC control system, 15" touch screen.
- Reasonable layout, high mechanical strength and perfect thermal stability, overall appearance appears in closed stainless steel design.
- Swing unit optimizes performance of slicing sapphire, shortening time, and improving end-face quality of ingots, reducing quantity of pulleys, which decreases consumables such as wire and pulleys.
- The equipment can not only multi-line slice, but also single line slice can be combined as modularization. Both upper and lower worktable can adjust crystal orientation by 360° or 90° which can slice whatever size.
- By regulating depth of wire on cutting wheel, slice whatever size of block.
- Optimize tension of control system, by high-tension slicing, ensuring quality and efficiency of squaring.
- Use operating handle, fast layout cable, shortening time of standby and reducing management cost.
- Apply double station, adjust crystal orientation on multi aspect. Flexible layout and use in squaring, cutting and grinding.

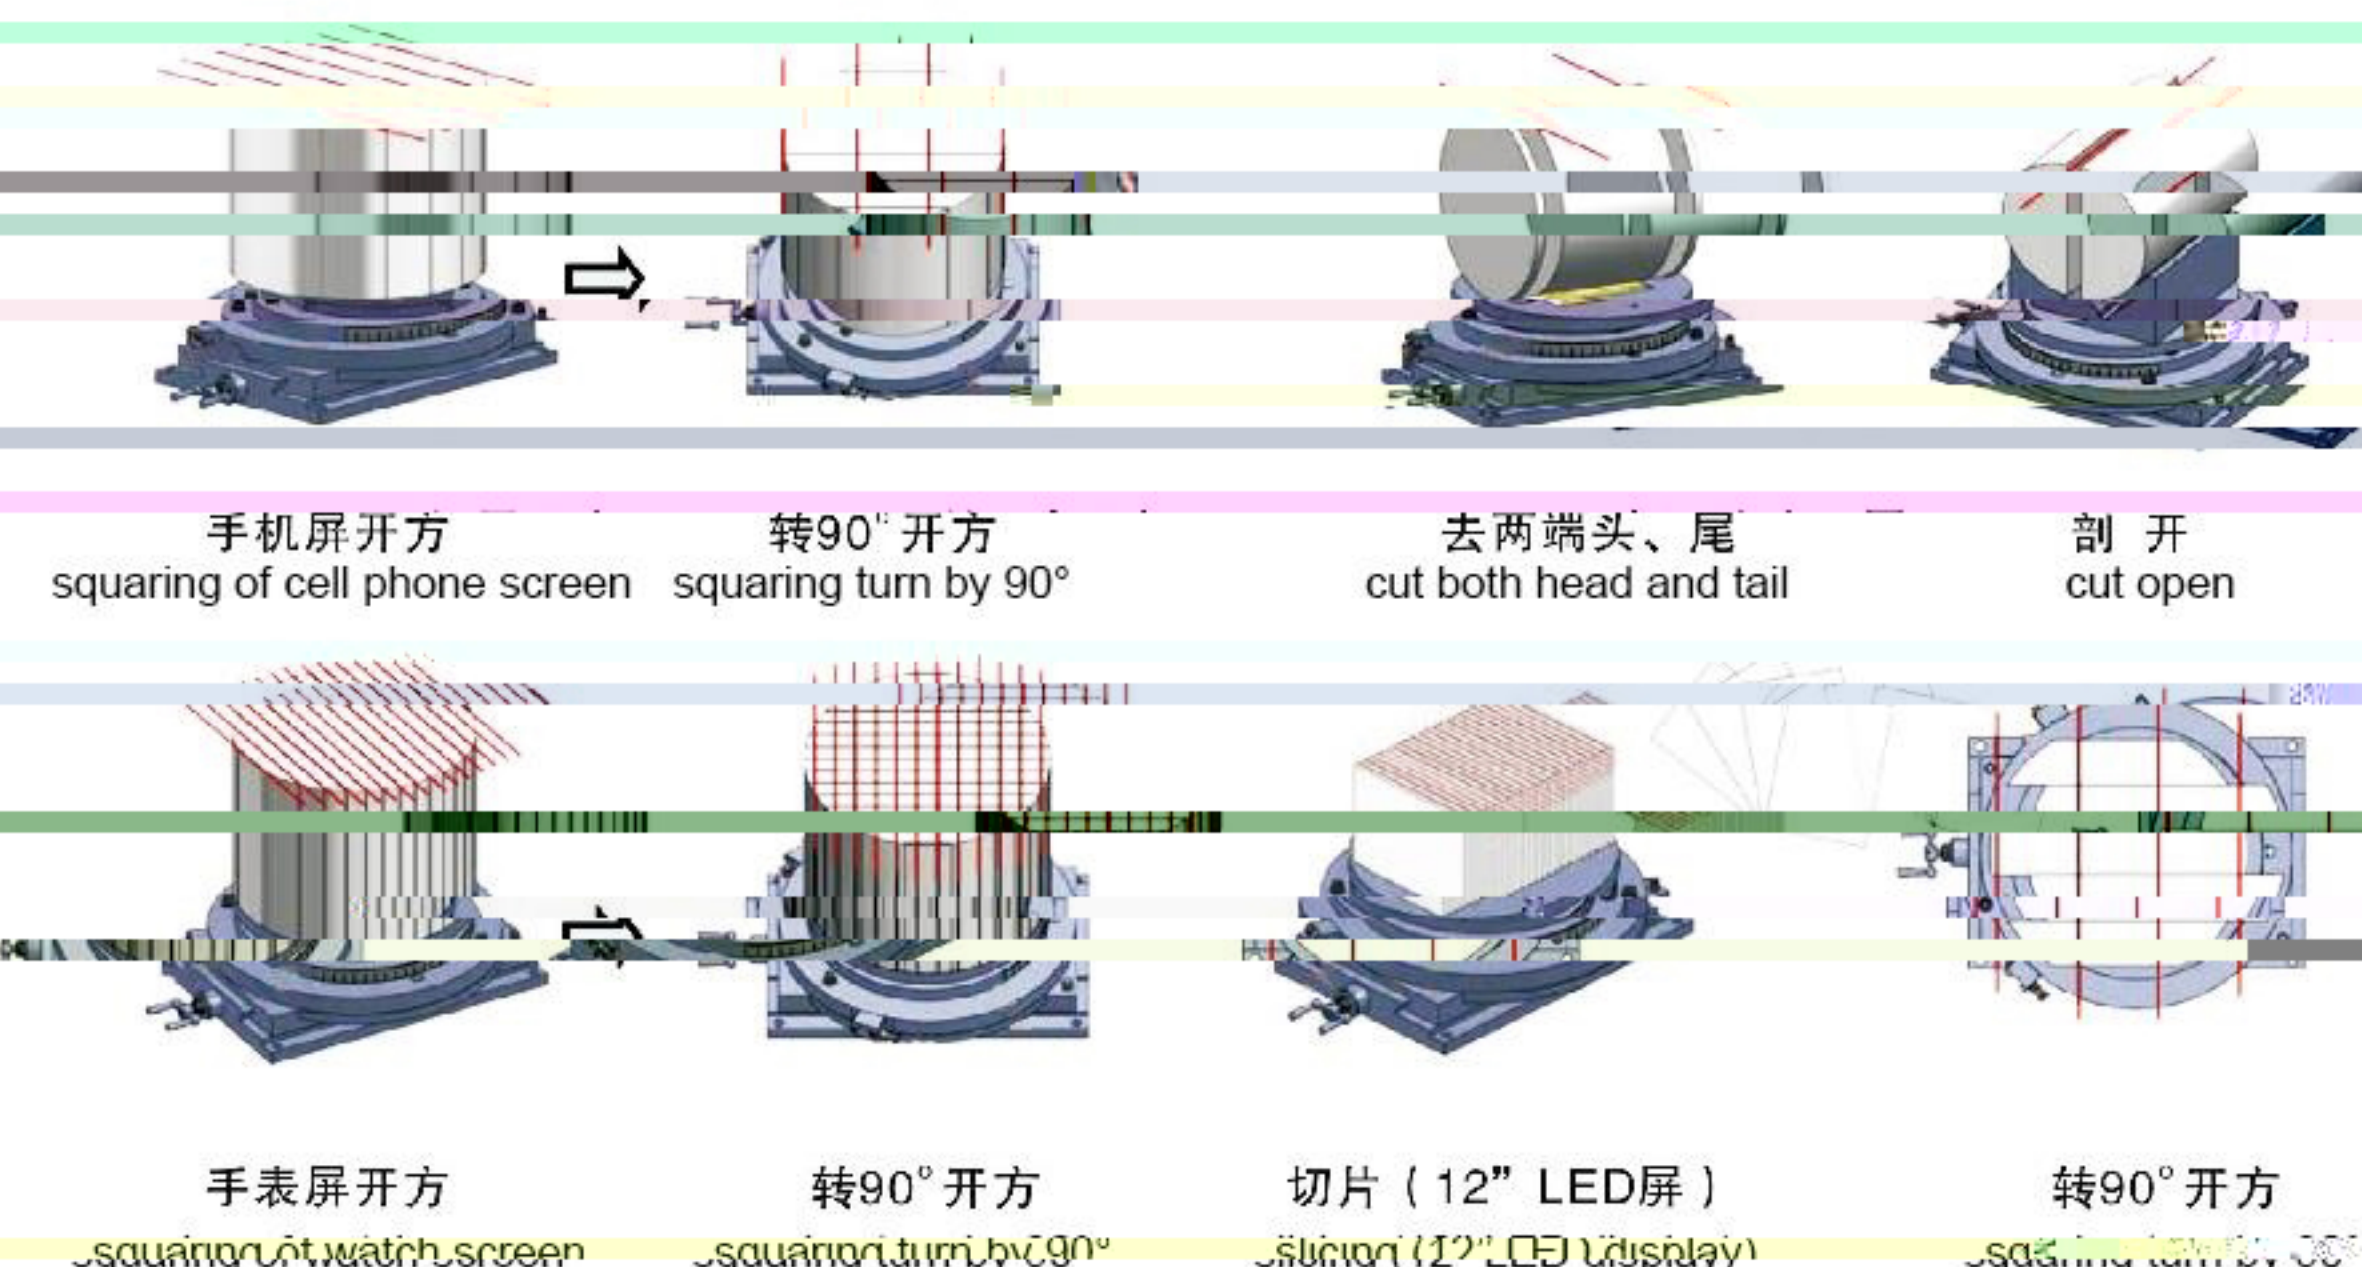

由于产品不断创新，本资料仅供参考，如有修改恕不通知，本公司保留最终解释权。
As products are improving gradually, the above information is for reference only. Without notification, we company reserves the final explanation rights.