


HY-NT11/48GSF



LID

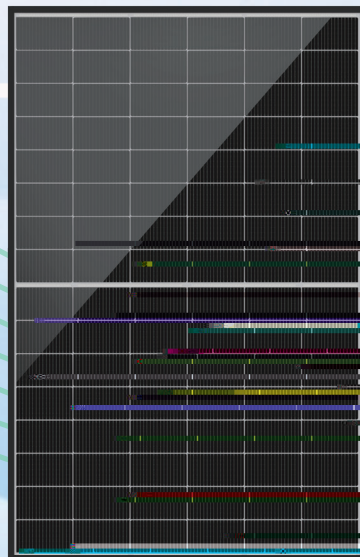

PID



23.5




-0.28%/



BOS LCOE

- IEC 61215 , IEC 61730
- ISO 9001 2015
- ISO 14001 2015
- ISO 45001 2018

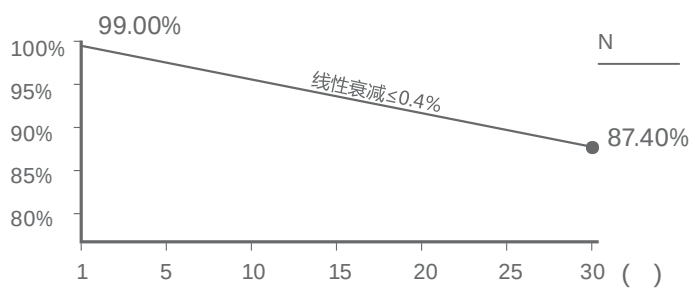

Munich RE



+86 0510-8595 1888

7



info@hysolar.com



https://www.hysolar.com

1000W/m²	25	±1.5								
(Pmax/W)	450	455	460	465	470					
(Vmpp/V)	29.86	30.06	30.26	30.46	30.66					
(Impp/A)	15.08	15.14	15.21	15.27	15.33					
(Voc/V)	35.44	35.64	35.84	36.04	36.24					
(Isc/A)	15.97	16.02	16.09	16.15	16.21					
	22.5%	22.8%	23.0%	23.3%	23.5%					
					(Pmpp)	-0.28%/				
					(Isc)	+0.043%/				
					(Voc)	-0.24%/				
					(NMOT)	42±2°C				
					(IEC)	1500Vdc				
					IP 68					
					30A					
					-40~+85°C					

